




SYCOR
TECHNOLOGY INC.

Braid

Standard Flat Braid

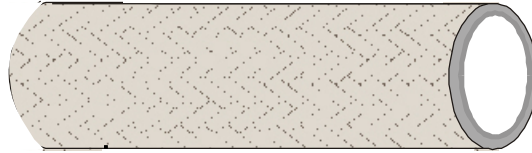

Sycor Part Number	Size AWG	Circular MIL Area	Wire Size AWG	Number Of Wires	Constructi	Nominal Width Inches	Nominal Thicknes Inches	Approx. Weight Lbs./Mft.
AOC4243230TF*		307,200	30	3072	4x(24-32-30)	1-3/8"	1/2"	1080
AOC3243230TF	4/0	230,400	30	2304	3x(24-32-30)	1-1/4"	3/8"	795
AOC2243530TF	3/0	168,000	30	1680	2x(24-35-30)	1-1/4"	1/4"	570
AOC2243230TF	3/0	153,600	30	1536	2x(24-32-30)	1-1/4"	1/4"	530
AOC2242730TF	2/0	129,600	30	1296	2x(24-27-30)	1-1/8"	1/4"	445
AOC244430TF	1/0	105,600	30	1056	24-44-30	1-1/4"	1/8"	355
AOC188436TF	1/0	100,800	36	4032	18-84-36	1-5/8"	1/8"	354
AOC243230TF	1	76,800	30	768	24-32-30	1"	1/8"	265
AOC486036TF	1	72,000	36	2880	48-60-36	1-1/4"	3/32"	250
AOC242730TF	2	64,800	30	648	24-27-30	15/16"	1/8"	220
AOC242030TF	3	48,000	30	480	24-20-30	3/4"	1/8"	165
AOC484036TF	3	48,000	36	1920	48-40-36	1"	3/32"	160
AOC488640TF	4	39,670	40	4128	48-86-40	1"	1/8"	130
AOC246736TF	4	40,200	36	1608	24-67-36	3/4"	3/32"	135
AOC241530TF	5	36,000	30	360	24-15-30	5/8"	3/32"	118
AOC482236TF	6	26,400	36	1056	48-22-36	7/8"	1/16"	90.4
AOC241030TF	6	24,000	30	240	24-10-30	1/2"	3/32"	80
AOC244036TF	6	24,000	36	960	24-40-36	17/32"	3/32"	75
AOC481936TF	7	22,800	36	912	48-19-36	13/16"	1/16"	77
AOC321736TF 161836TF	7	20,800	36	832	(32-17-36) (16-18-36)	1"	1/16"	72
AOC481536TF	8	18,000	36	720	48-15-36	5/8"	1/16"	58.8

*The suffix "T" denotes tinned copper braids. If a bare copper braid is desired, replace the "T" with "B".

DESCRIPTION:

Standard braided Bare or Tinned Copper wire for: Bonds, Grounds, Leads, Flexible Connectors.

VALUE ADDED SERVICES

Cut Pieces, Tin Dipping,
Ground Straps, Terminating

Sycor Technology Inc. Advance Wire and Cable Division
2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260

Sycor Advance Wire and Cable