




SYCOR
TECHNOLOGY INC.

Braid

Standard Flat Braid

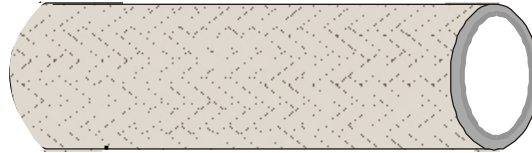

Sycor Part Number	Size AWG	Circular MIL Area	Wire Size AWG	Number Of Wires	Construction	Nominal Width Inches	Nominal Thickness Inches	Approx. Weight Lbs./Mft.
AOC240730TF	8	16,800	30	168	24-7-30	7/16"	1/16"	56
AOC481136TF	9	13,200	36	528	48-11-36	5/8"	3/64"	43
AOC250530TF	9	12,000	30	120	24-5-30	3/8"	1/16"	40
AOC240430TF	10	9,600	30	96	24-4-30	5/16"	1/16"	32
AOC241636TF	10	9,600	36	384	24-16-36	3/8"	1/16"	31
AOC480836TF	10	9,600	36	384	48-8-36	1/2"	1/32"	32
AOC241336TF	11	7,800	36	312	24-13-36	9/32"	3/64"	25
AOC480636TF	12	7,200	36	288	48-6-36	3/8"	1/32"	24.2
AOC241036TF	12	6,000	36	240	24-10-36	1/4"	3/64"	20
AOC240736TF	14	4,200	36	168	24-7-36	7/32"	1/32"	14.1
AOC240536TF	15	3,000	36	120	24-5-36	3/16"	1/32"	10
AOC240436TF	16	2,400	36	96	24-4-36	5/32"	1/32"	8
AOC124244TF	17	2,016	44	504	12-42-44	.065" Round		6.07
AOC160536TF	17	2,000	36	80	16-5-36	1/8"	1/32"	6.7
AOC240336TF	18	1,800	36	72	24-3-36	7/64"	1/32"	5.7
AOC160436TF	18	1,600	36	64	16-4-36	3/32"	1/32"	5.1
AOC240236TF	19	1,200	36	48	24-2-36	3/32"	1/32"	3.86
AOC160336TF	19	1,200	36	48	16-3-36	3/32"	1/32"	3.86
AOC120940TF	20	1,038	40	108	12-9-40	.049" Round		3.34
AOC160640TF	20	923	40	96	16-6-40	1/16"	1/32"	3.08
AOC160236TF*	21	800	36	32	16-2-36	1/16"	1/32"	2.63

*The suffix "T" denotes tinned copper braids. If a bare copper braid is desired, replace the "T" with "B".

DESCRIPTION:

Standard braided Bare or Tinned Copper wire for: Bonds, Grounds, Leads, Flexible Connectors.

VALUE ADDED SERVICES

Cut Pieces, Tin Dipping,
Ground Straps, Terminating

Sycor Advance Wire and Cable