




**SYCOR**  
TECHNOLOGY INC.

**Military Spec. Hook-Up Wire**

**MIL-W-16878/6, Type ET**  
200°C, 600 Volts

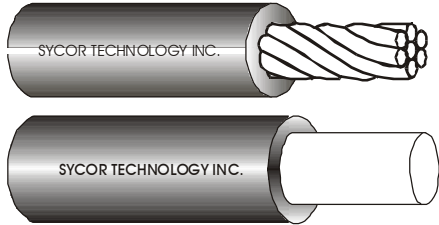

**APPROVALS:**  
MIL-W-16878/6, Type ET

**CONDUCTOR:**  
Stranded or solid silver plated copper.

**INSULATION:**  
Extruded PTFE Teflon  
(Polytetrafluoroethylene)

**TEMPERATURE RATING:**  
-65°C to +200°C

**VOLTAGE RATING:**  
600 Volts

**APPLICATION:**  
Suitable for high frequency use at elevated temperatures.

**COLOUR:**  
Stock colours 0-9. Custom colours and striped combinations available upon request.

**COLOUR CODES:**

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

Sycor Part Number	Size AWG	Stranding	Insulation Thickness In Inches	Nominal O.D. In Inches	Approx. Weight Lbs/Mft.
A0J3801S	38	Solid	.006"	.015"	.170
A0J3807S	38	7/46	.006"	.016"	.180
A0J3601S	36	Solid	.006"	.016"	.270
A0J3607S	36	7/44	.006"	.016"	.33
A0J3401S	34	Solid	.006"	.016"	.340
A0J3407S	34	7/42	.006"	.016"	.380
A0J3219S	32	19/44	.006"	.021"	.450
A0J3201S	32	Solid	.006"	.020"	.480
A0J3207S	32	7/38	.006"	.021"	.520
A0J3001S	30	Solid	.006"	.022"	.590
A0J3007S	30	7/38	.006"	.024"	.660
A0J3019S	30	19/42	.006"	.024"	.680
A0J2801S	28	Solid	.006"	.025"	.800
A0J2807S	28	7/36	.006"	.027"	.910
A0J2819S	28	19/40	.006"	.027"	.980
A0J2601S	26	Solid	.006"	.029"	1.16
A0J2607S	26	7/34	.006"	.031"	1.30
A0J2619S	26	19/38	.006"	.031"	1.40
A0J2401S	24	Solid	.006"	.033"	1.95
A0J2407S	24	7/32	.006"	.036"	1.90
A0J2419S	24	19/36	.006"	.036"	2.02
A0J2207S	22	7/30	.006"	.042"	2.80
A0J2219S	22	19/34	.006"	.042"	2.98
A0J2007S	20	7/28	.006"	.050"	4.24
A0J2019S	20	19/32	.006"	.050"	4.60

**VALUE ADDED SERVICES**  
Cutting & Stripping, Stripping,  
Terminating

*Sycor Advance Wire and Cable*