




**SYCOR**  
TECHNOLOGY INC.

**Hook-Up Wire**

**CSA SR PVC, UL 1061**  
**80°C, 300 Volts**

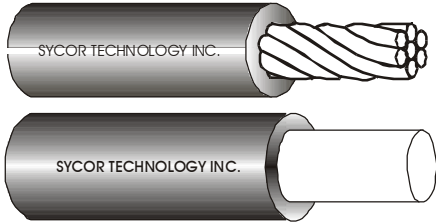

**APPROVALS:**  
CSA and UL approved AWM.  
CSA Type SR PVC  
UL Style 1061

**CONDUCTOR:**  
Solid or stranded tinned copper.

**INSULATION:**  
Semi-rigid Polyvinyl Chloride.

**TEMPERATURE RATING:**  
80°C

**VOLTAGE RATING:**  
300 Volts.

**APPLICATION:**  
For use in internal wiring of electrical and electronic equipment.

**COLOUR:**  
Stock colours 0-9. Custom colours and striped combinations available upon request.

**COLOUR CODES:**

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

Sycor Part Number	Size AWG	Stranding	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/Mft.
AOL3207T	32	7/40	.009"	.028"	1061	0.6
AOL3001T	30	Solid	.009"	.030"	1061	0.7
AOL3007T	30	7/38	.009"	.032"	1061	0.8
AOL2801T	28	Solid	.009"	.033"	1061	0.9
AOL2807T	28	7/36	.009"	.037"	1061	1.1
AOL2601T	26	Solid	.009"	.038"	1061	1.4
AOL2607T	26	7/34	.009"	.041"	1061	1.5
AOL2401T	24	Solid	.009"	.042"	1061	1.9
AOL2407T	24	7/32	.009"	.045"	1061	2.1
AOL2201T	22	Solid	.009"	.047"	1061	2.8
AOL2207T	22	7/30	.009"	.051"	1061	3.0
AOL2219T	22	19/34	.009"	.052"	1061	3.2
AOL2001T	20	Solid	.009"	.053"	1061	3.9
AOL2007T	20	7/28	.009"	.058"	1061	4.4
AOL2019T	20	19/32	.009"	.062"	1061	4.9
AOL1807T	18	7/26	.009"	.068"	1061	6.6
AOL1819T	18	19/30	.009"	.072"	1061	7.2
AOL1619T	16	19/29	.009"	.079"	1061	8.9

**\*\* OTHER GAUGES AND STRANDING AVAILABLE UPON REQUEST \*\***

**VALUE ADDED SERVICES**  
Cutting & Stripping, Stripping,  
Terminating, Custom Printing  
and Colouring