




**SYCOR**  
TECHNOLOGY INC.

**Hook-Up Wire**

**CSA AWM, UL 1429/1534**

**80°C, 150 Volts**

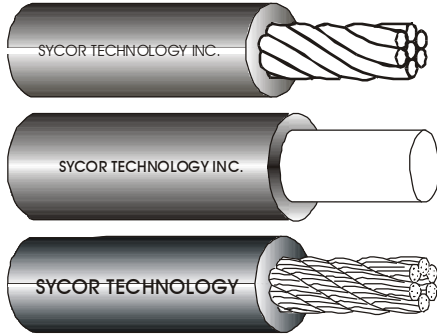

**APPROVALS:**  
UL Style 1429 and 1534  
CSA XLAWM

**CONDUCTOR:**  
Solid, stranded or prefused tinned copper.

**INSULATION:**  
Irradiated Polyvinyl Chloride\*  
\*XLPVC

**TEMPERATURE RATING:**  
80°C

**VOLTAGE RATING:**  
150 Volts

**APPLICATION:**  
Appliances, computer wiring, business machines, instrumentation and control systems.

**COLOUR:**  
Stock colours 0-9. Custom colours and striped combinations available upon request.

**COLOUR CODES:**  
0 - Black                      5 - Green  
1 - Brown                     6 - Blue  
2 - Red                        7 - Violet  
3 - Orange                    8 - Grey  
4 - Yellow                    9 - White

**VALUE ADDED SERVICES**  
Cutting & Stripping, Striping,  
Terminating, Custom Printing,  
Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/MFt.
AOS3001T	30	Solid	.010"	.032"	1429	.753
AOS3007T	30	7/38	.010"	.033"	1429	.793
AOS2801T	28	Solid	.010"	.034"	1429	.951
AOS2807T	28	7/36	.010"	.036"	1429	1.086
AOS2819T	28	19/40	.010"	.036"	1429	1.130
AOS2601T	26	Solid	.010"	.038"	1429	1.326
AOS2607T	26	7/34	.010"	.040"	1429	1.437
AOS2619T	26	19/38	.010"	.040"	1429	1.582
AOS2401T	24	Solid	.010"	.042"	1429	1.903
AOS2407T	24	7/32	.010"	.045"	1429	2.079
AOS2419T	24	19/36	.010"	.045"	1429	2.140
AOS2201T	22	Solid	.010"	.047"	1429	2.660
AOS2207T	22	7/30	.010"	.051"	1429	2.930
AOS2219T	22	19/34	.010"	.052"	1429	3.174
AOS2001T	20	Solid	.010"	.054"	1429	3.980
AOS2007T	20	7/28	.010"	.059"	1429	4.457
AOS2010T	20	10/30	.010"	.058"	1429	4.210
AOS2019T	20	19/32	.010"	.060"	1429	4.810
AOS1801T	18	Solid	.010"	.061"	1429	5.937
AOS1807T	18	7/26	.010"	.070"	1429	6.760
AOS1816T	18	16/30	.010"	.069"	1429	6.223
AOS1819T	18	19/30	.010"	.070"	1429	7.061
AOS1601T	16	Solid	.010"	.073"	1429	9.103
AOS1619T	16	19/29	.010"	.078"	1429	9.504
AOS1626T	16	26/30	.010"	.082"	1429	9.636
AOS1401T	14	Solid	.010"	.086"	1534	12.430
AOS1419T	14	19/27	.010"	.096"	1534	13.818

**\*\* OTHER COMBINATIONS AVAILABLE UPON REQUEST \*\***