




SYCOR
TECHNOLOGY INC.

Thermostat Wire

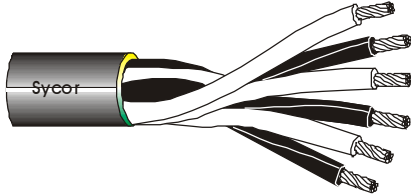

CONSTRUCTION:

Solid copper conductors, colour coded PVC insulation, twisted conductors and brown PVC jacket. Two conductor constructions available twisted or parallel.

APPLICATION:

For use in wiring low voltage heating and air conditioning controls, thermostats, door bells, and annunciator systems, burglar alarms and intercom systems.

APPROVALS:

Certified to CSA standard C22.2 No. 214 Communication Cables. UL listed Type CM as per subject 444. Passes CSA FT-1 vertical flame test. Passes CSA FT-4 vertical flame test. Passes UL 70,000 BTU flame test.

COLOURCODECHART:

4

Sycor Part Number	# of Con	Size AWG	Strand	D.C.R ohms/100 Meters	Nominal O.D. In Inches
CSA-FT4					
	2	18	Solid	20.96	.176"
	3	18	Solid	20.96	.187"
	4	18	Solid	20.96	.202"
	5	18	Solid	20.96	.220"
	6	18	Solid	20.96	.239"
	7	18	Solid	20.96	.239"
	8	18	Solid	20.96	.259"
	9	18	Solid	20.96	.277"
	10	18	Solid	20.96	.297"
	11	18	Solid	20.96	.302"
	12	18	Solid	20.96	.312"
Economy Plastic Jacket					
	2	20	Solid	33.14	.143"
	3	20	Solid	33.14	.151"
	4	20	Solid	33.14	.165"
	5	20	Solid	33.14	.181"
	6	20	Solid	33.14	.197"
	7	20	Solid	33.14	.197"
	8	20	Solid	33.14	.213"
	9	20	Solid	33.14	.230"
	10	20	Solid	33.14	.248"

Sycor Advance Wire and Cable