




SYCOR
TECHNOLOGY INC.

Computer Cable

Multi-Paired Individually Foil Shielded Low Capacitance

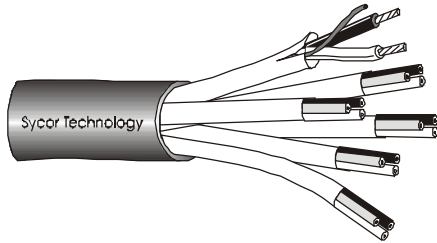

CONSTRUCTION:

Stranded tinned copper conductors with Polyethylene insulation, Polyvinyl Chloride jacket, 100% individual foil shield, and a stranded tinned copper drain wire.

TEMPERATURE RATING:

-20°C to 80°C

VOLTAGE RATING:

300 Volts

JACKET COLOUR:

Grey

COLOUR CODE CHART:

3

APPROVAL:

CSA FT-4

Sycor Part Number	# of Pairs	Size AWG	Strand	Nominal Insulation Thickness In Inches	Nominal Jacket Thickness In Inches	Nom. O.D.	Nom. Cap. pF/Ft.
Q1A0224	2	24	7/32	.015"	.045"	.240"	12.5
Q1A0324	3	24	7/32	.015"	.045"	.278"	12.5
Q1A0424	4	24	7/32	.015"	.050"	.350"	12.5
Q1A0624	6	24	7/32	.015"	.055"	.394"	12.5
Q1A0924	9	24	7/32	.015"	.055"	.480"	12.5
Q1A1224	12	24	7/32	.015"	.060"	.540"	12.5
Q1A1524	15	24	7/32	.015"	.060"	.570"	12.5

VALUE ADDED SERVICES

Cutting & Stripping, Cable & Harness Assembly, Custom Colouring, Striping, Bonding, Round to Flat Lamination, Tin Dipping, Re-spooling

Sycor Advance Wire and Cable